


HDPE Pipe with Clamping Socket

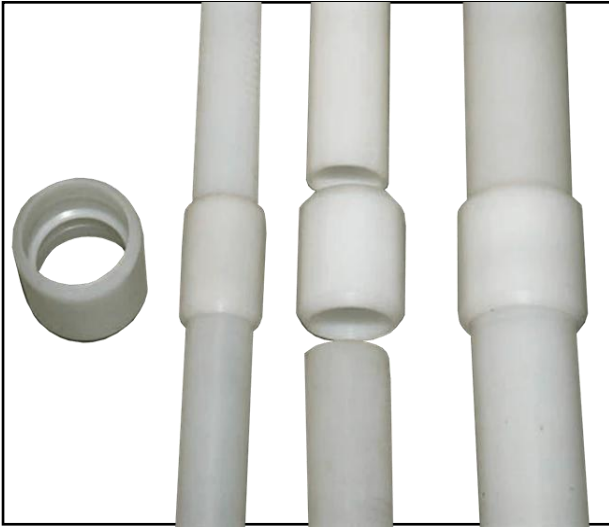

These HDPE pipes are provided with a clamping socket and have a thin wall. The pipes are suited for application in wells that monitor the first water containing layer at 6 meters at most.

The material of these pipes causes no water pollution and makes high monitoring quality possible. HDPE provides satisfactory results, and it is much cheaper than PTFE.

HDPE pipes are suitable for use in contaminated locations because they are resistant to aromatic and chlorinated solvents. However, they are permeable to these substances, which can pose a problem if the groundwater quality in a deep aquifer under a highly contaminated soil must be determined.

Key Features

- Resistant to mineral acids, oils, alcohols
- Lightweight pipe
- No traces of heavy metals or plasticisers
- Higher chemical resistance than PVC
- Attractively priced

Variations

- 10.01.90.01 Plain pipe 32x28 mm, 2 m. 20 pc.
- 10.01.90.02 Filter pipe with 0.3 mm horizontal slits. 32x28 mm, 2 m. 20 pc.
- 10.01.90.03 Plain/filter pipe 32x28 mm, 2 m. 20 pc.