


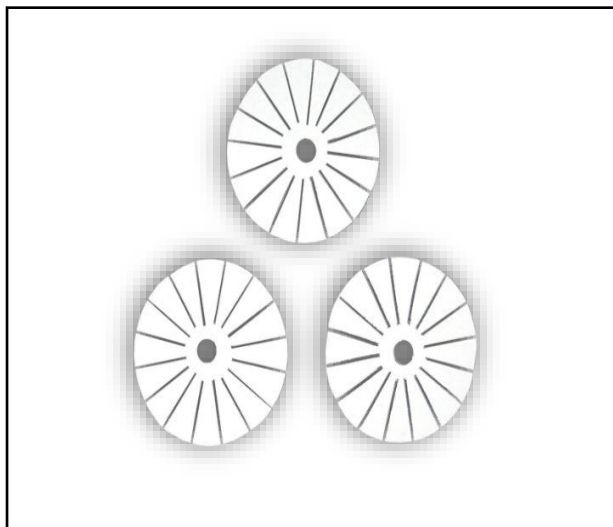

The plastic sand catcher serves to prevent sand from running in or out of the space around the monitoring wells. If the bentonite sleeve is not sufficiently swollen, sand can still penetrate during the period when the bentonite slowly swells. The sand catcher keeps this from happening.

Sand-bentonite catcher for quality monitoring well, set of 50 pieces.

## Key Features

A sand catcher is used in combination with the quality monitoring wells with bentonite collar. It serves to prevent sand from flowing past the filter before the collar is swollen.

| Variations    |          |               |
|---------------|----------|---------------|
| Product Code  | Diameter | Dimensions    |
| 10.01.99.62   | 20 mm    | 19.5 x 105 mm |
| 10.01.99.63   | 26.6 mm  | 26 x 105 mm   |
| 10.04.99.64   | 32 mm    | 33 x 170 mm   |
| 10.04.01.64 * | N/A      | 29 170 mm     |

\*To be placed between the screw thread

